




Installation Instructions


Teeter Totter (Single)

Residential
Ground Space: 10.5' x 2.5'
Play Space: 14.5' x 6.5'

Commercial
Ground Space: 10.5' x 2.5'
Play Space: 22.5' x 14.5'

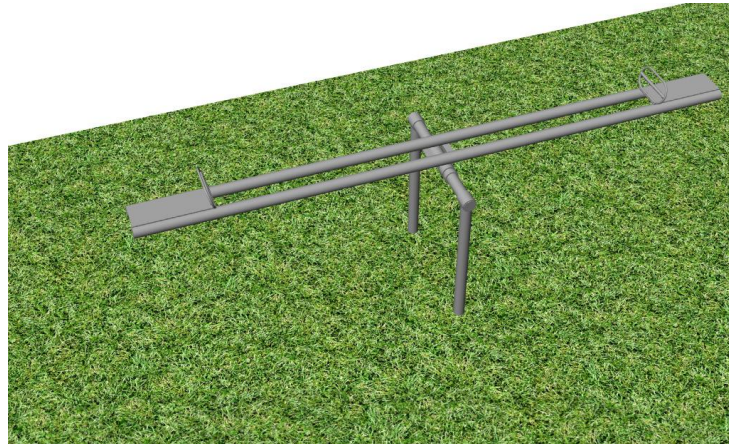



1. Insert plugs in cross piece ends.
2. Using a tape measure and marker, mark position of seat pivot along the cross bar, so there is equal space on both sides.

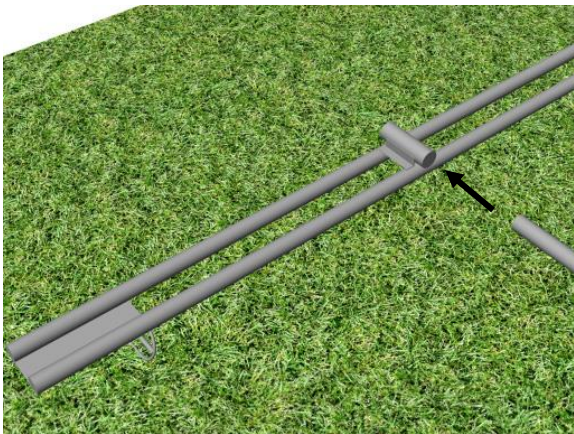

Start by placing seat upside down on ground. Slide the cross piece through the seat pivot, followed by the retaining rings. They should be almost touching teeter totter seat pivot. (one on each end) Then place the legs on each end. Once all pieces are equally spaced, insert and tighten all set screws. Turn the teeter totter over and mark the holes, dig, level out and mix concrete.

*Step by step Instructions and image found below.

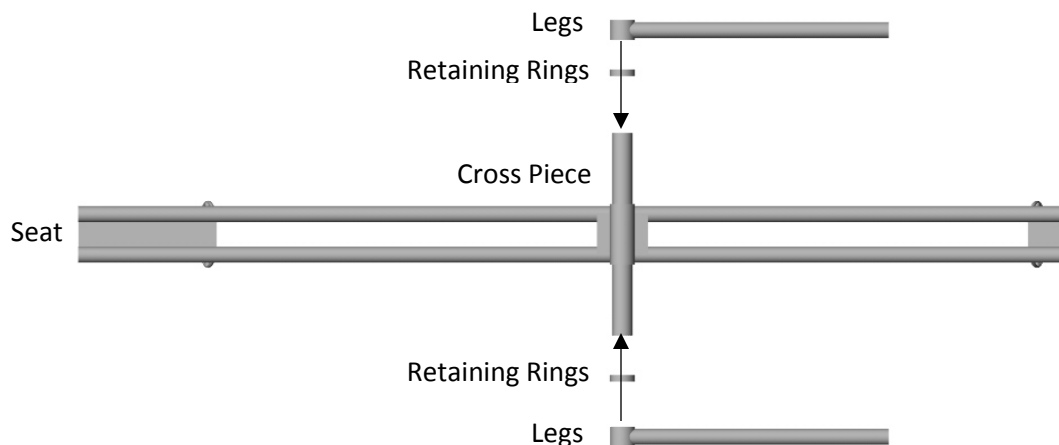

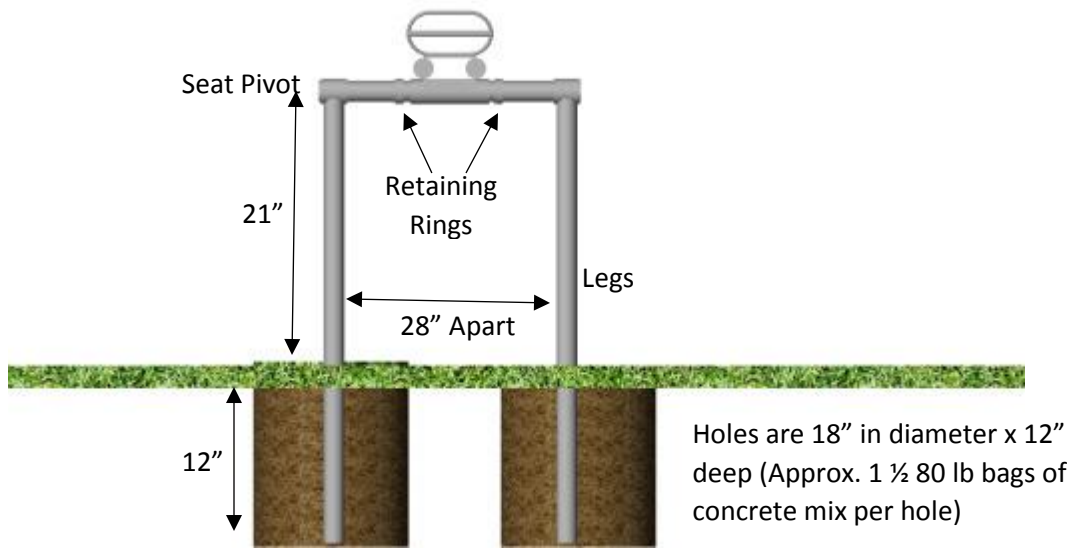

3. Assemble onto the Cross Bar: Center Leg, Inner retaining rings, seats, outer retaining rings, outer legs.
4. Securely tighten the set screws of the retaining rings to the Cross Bar. These should fit loosely against the Teeter Totter seat pivot, allowing free vertical movement of the seat while preventing horizontal movement along the cross bar.
5. Determine location to place let holes and dig holes 12" deep x 18" in diameter.
6. Place Teeter Totter Legs into holes. Support the Teeter Totter seats with cinder blocks or board so the legs dangle just above the bottom of the holes.
7. Level and plum the legs and secure set screws, holding the legs into proper position.
8. Mix and pour cement.
9. Allow cement to cure 3-5 days.

Note: Recommended to use cinder blocks and boards under both seats to support while concrete cures.

